



DIGITAL PRODUCTION CHALLENGE II

LISBON 2016

Digital shoot,
 Film shoot,
 Digital postproduction,
 Digital workflow,
 How to choose?









Wednesday 30 November to Saturday 3 December 2016

Philippe Ros Cinematographer, AFC - Digital imaging Supervisor www.philipperos.com

The first questions

What is the feature or program's end destination?

Multiple Deliveries


▪ D-cinema digital projection (2K / 4K)? 3D?	
▪ 35 mm theater exhibition? Imax? Imax 3D?	
▪ HD digital projection? E-cinema? Large displays	
▪ Ultra HD? HDTV broadcast? 3D broadcast?	
▪ Augmented/Virtual Reality distribution?	
▪ Internet? VOD? Mobile phones?	
▪ DVD? Blu-ray distribution?	
▪ Current TV broadcast?	

©: Philippe Ros Cinematographer AFC & Digital Imaging Supervisor www.philipperos.com

The first questions

The DCP


▪ D-cinema digital projection (2K / 4K)? 3D?




The DCP or Digital Cinéma Packaging is the release format for D-Cinéma (Digital Cinema), the frame being encoded in JPEG 2000.

D-Cinema **2K** frame format: 2048 pixels x 1080 lines

D-Cinema **4K** frame format: 4096 pixels x 2160 lines

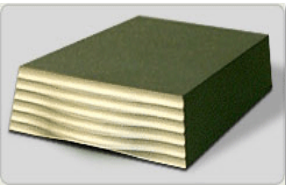

Reusable hard disk capacity:
2 long-feature films
 FORMAT: Compressed, split up in "reels"
 SECURITY: Encrypted using [128-bit AES](#)




©: Philippe Ros Cinematographeur AFC & Digital Imaging Supervisor www.philipperos.com

The first questions

DPC FPS STANDARDS 2015

▪ D-cinema digital projection (2K / 4K)? 3D?






Here is the list of speeds that has been standardized (SMPTE 2009, ISO 2011)

2K	4K	3D
24 fps 2D 2K	24 fps 2D 4K	24 fps 3D 2K
25 fps 2D 2K	25 fps 2D 4K	25 fps 3D 2K
30 fps 2D 2K	30 fps 2D 4K	30 fps 3D 2K
48 fps 2D 2K		48 fps 3D 2K *
50 fps 2D 2K		50 fps 3D 2K *
60 fps 2D 2K		60 fps 3D 2K *

(All these 6 will run on many of even the oldest installations) (eg Any TI-DLP based projector with a Doremi server will do all six, and Doremi has more than 70% of the world market.... The majority of owners, however, do not know that their equipment can do it)

* The last three can only run on server/projectors manufactured after jan 2012 (Requires an Internal Media Block in the projector) and were standardized by SMPTE in 2013 only. All others 2009.

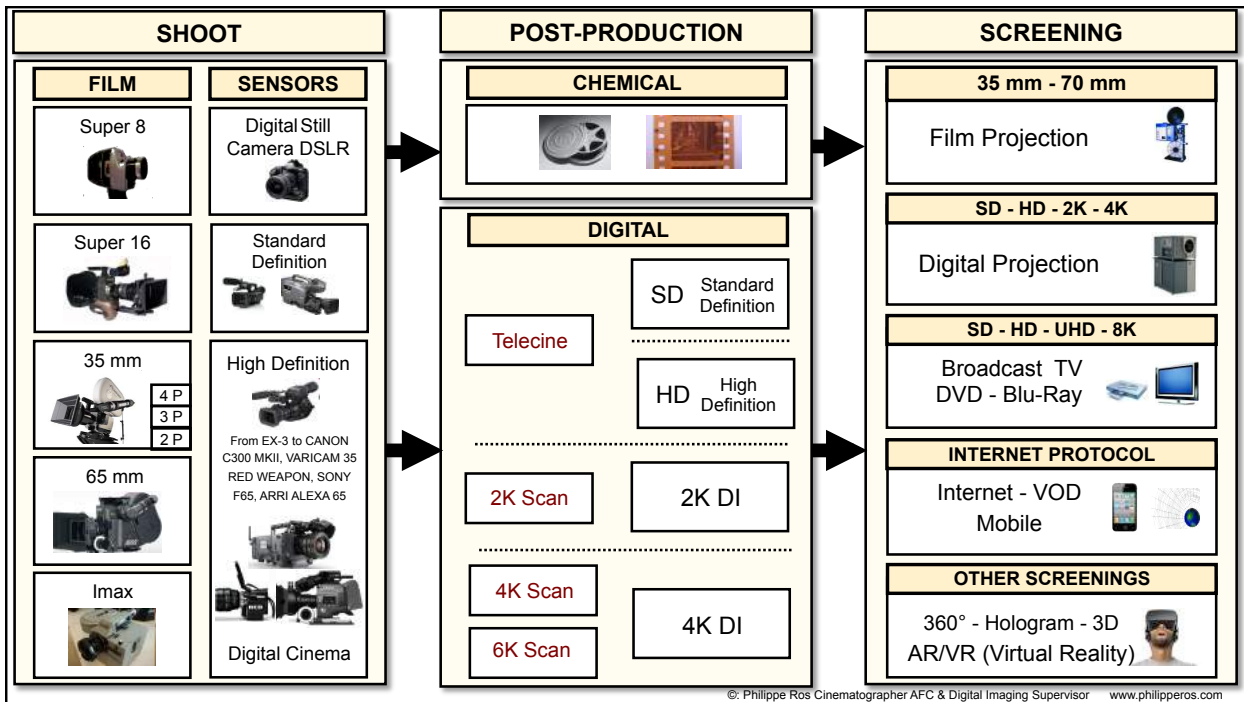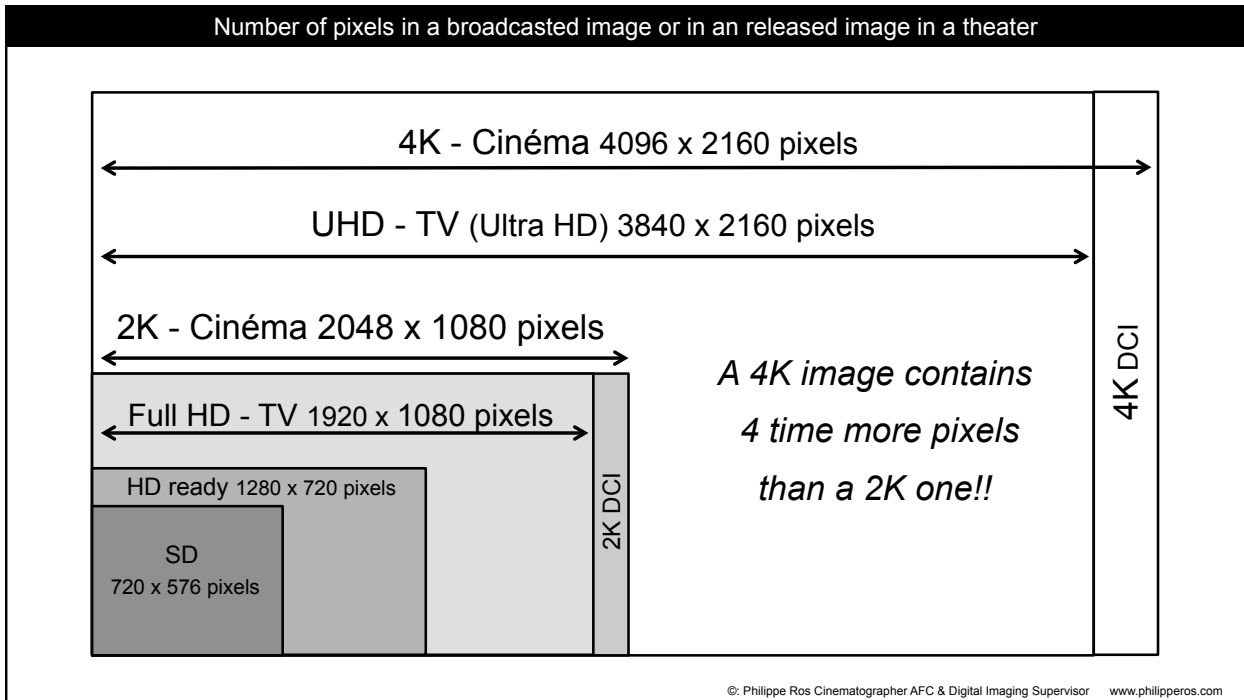

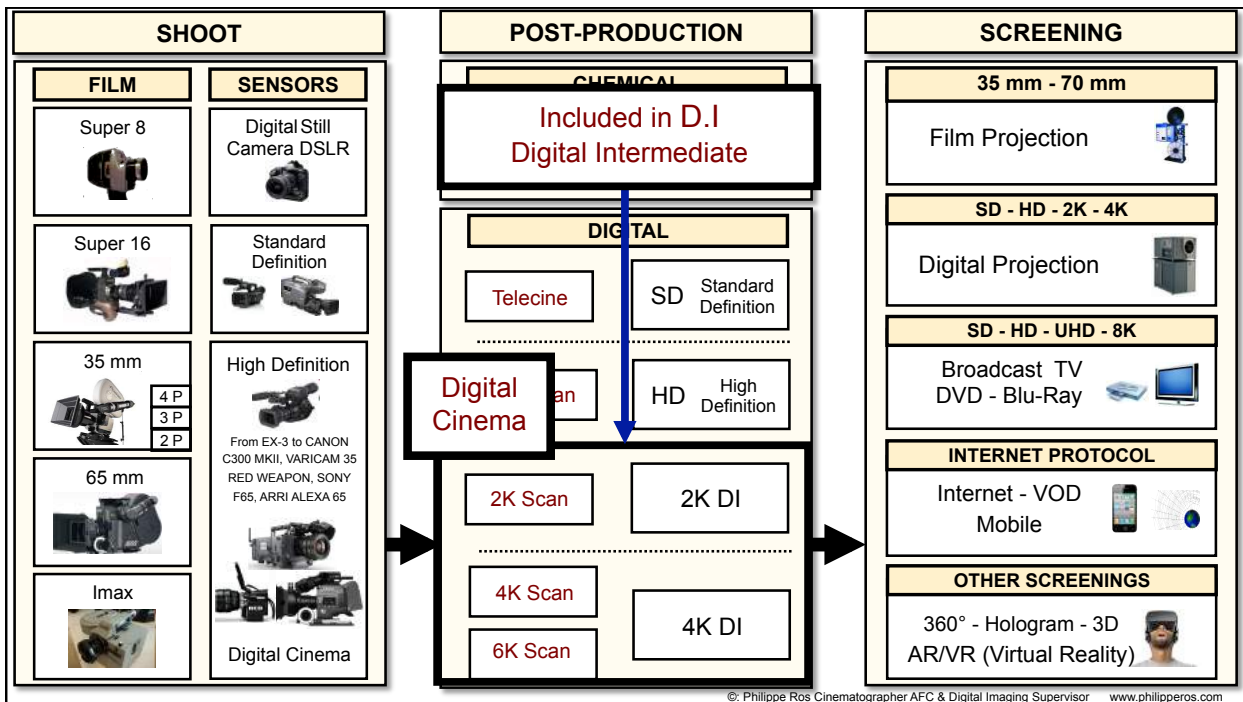

The first questions

The questions of camera and workflow choice are often answered in the program production chronological order:



We prefer answering questions in the opposite order




The digital intermediate

The digital intermediate


The process consists of the following components:



- Editorial Prep
- Scanning (when it's film)
- Assembling
- Color Correction
- Dustbusting
- Digital Opticals
- Special VFX
- Digital Previewing
- Recording
- Digital Deliverables



The original capture can be a regular film as well as a digital one.




Philippe Ros AFC Cinematographer, Digital Imaging Supervisor www.philipperos.com

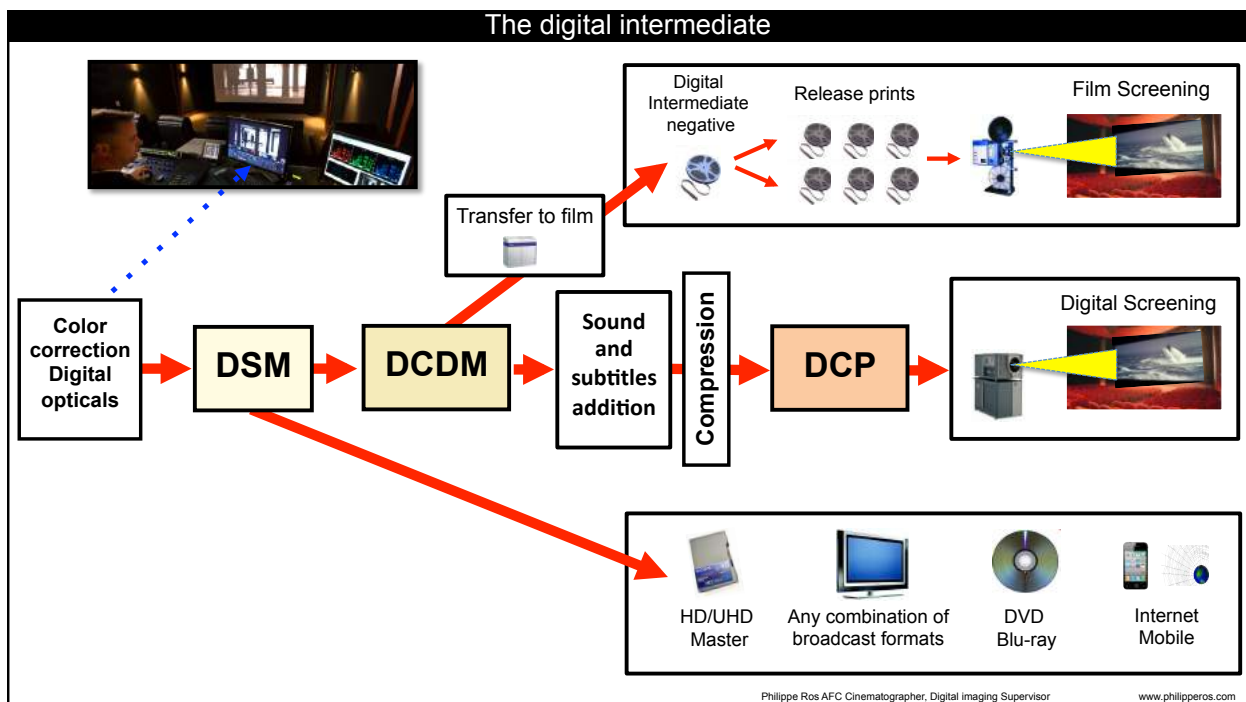

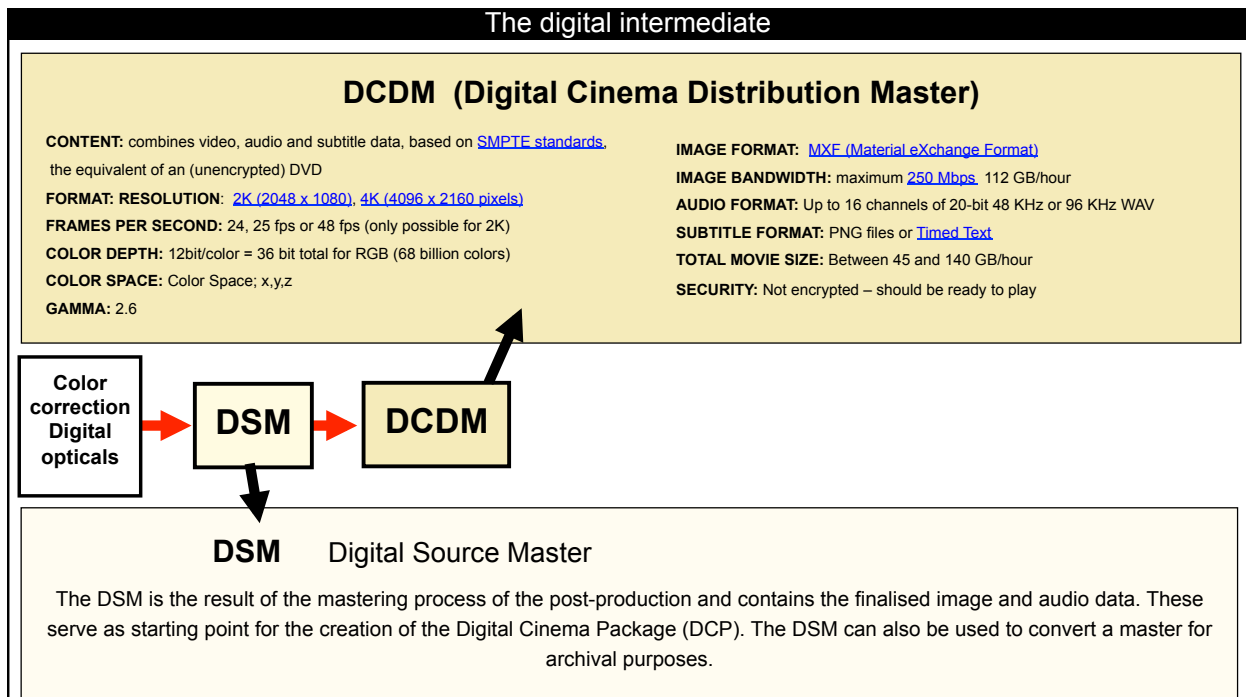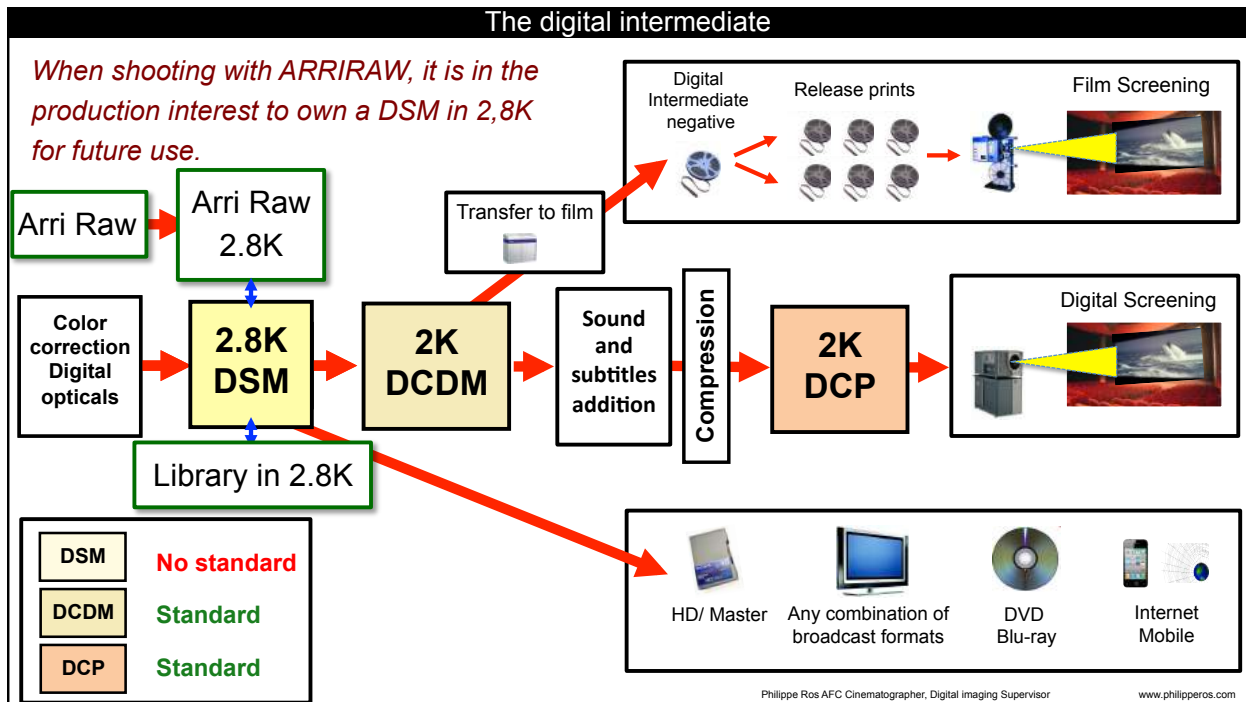

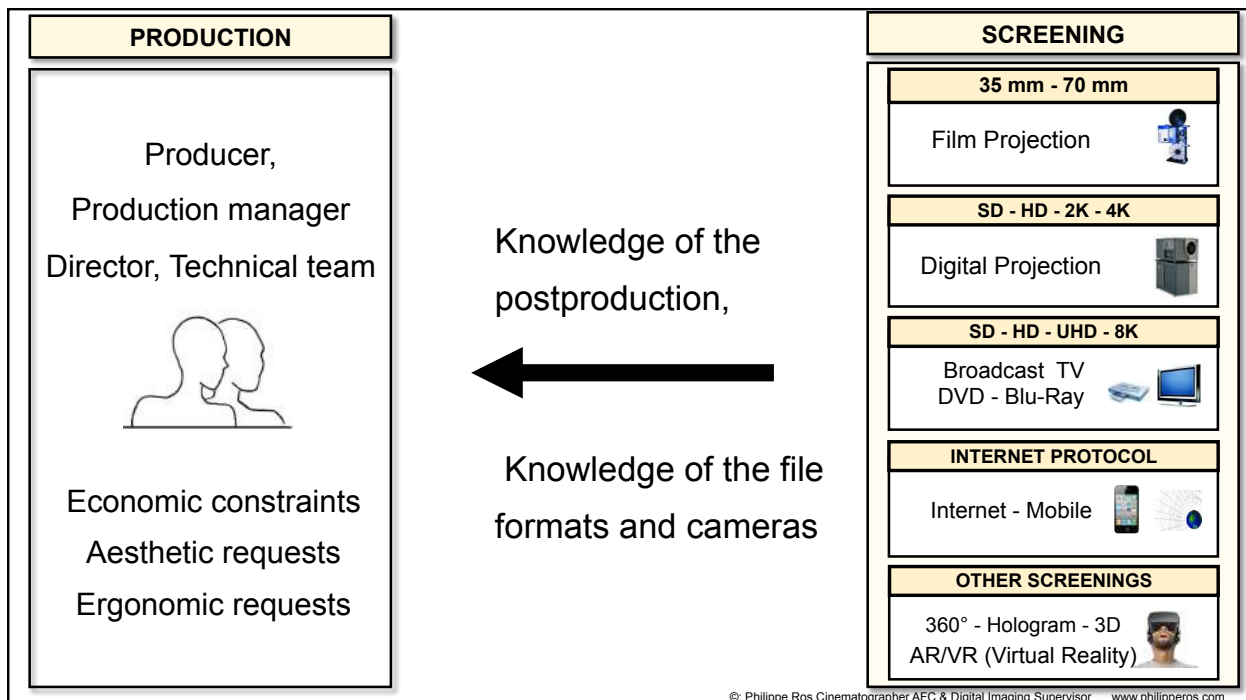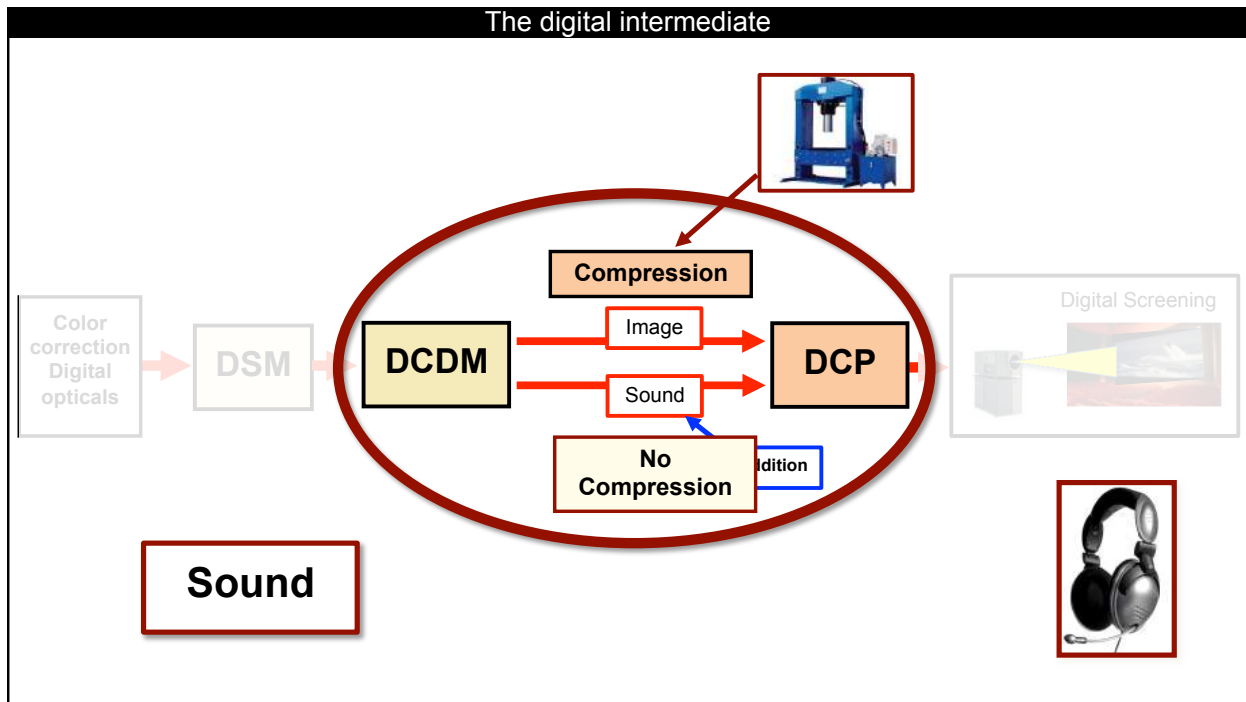

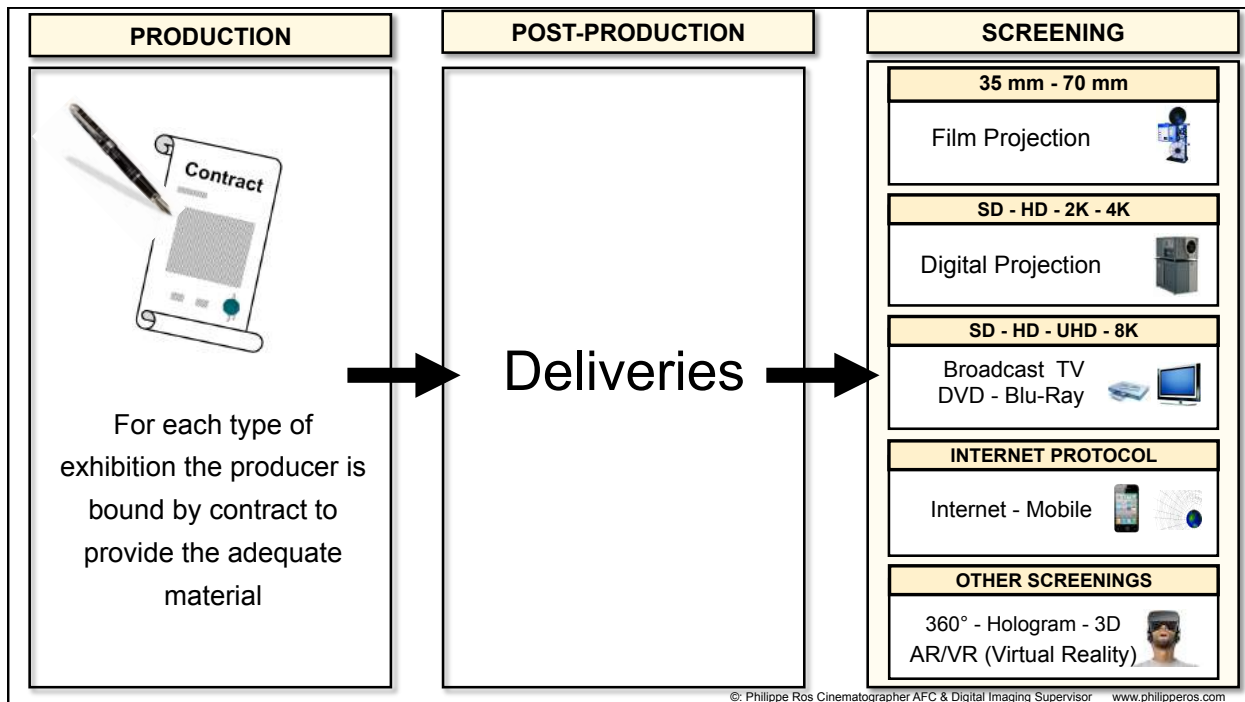

Some infos

- 1 bits
- 1 Byte = 1 Octet = 8 bits
- One disk of 320 Mo or 320 MB
- A feature film width : 1h ½ = 1,2 To

Multiple of Octets		
Name	Symbol	Value
Kiloctet	Ko	10^3
Mégaoctet	Mo	10^6
Gigaoctet	Go	10^9
Téraoctet	To	10^{12}
Pétaoctet	Po	10^{15}
Exaoctet	Eo	10^{18}
Zettaoctet	Zo	10^{21}
Yottaoctet	Yo	10^{24}

Bitrate required to transmit one HD image

- 1920 pixels (L) x 1080 lines (H) x 3 (colour chanel) x 10 bits x 25 fps = 1,55 Gb/s
- 1920 pixels (L) x 1080 lines (H) x 3 (colour chanel) x 8 bits x 25 fps = 1,25 Gb/s

©: Philippe Ros Cinematographeur AFC & Digital Imaging Supervisor www.philipperos.com

Technical basis

FILE FORMAT OR FILE TYPES & STORAGE DEVICES

- Resolution (space)
- Resolution (time) Frequency (speed)
- Color depth (quantization)
- Color sampling
- Codec
- Bitrate
- Container

• Media How to define a digital data stream
7 parameters by Franck Montagne

File types & Storage device

<p>▪ Resolution</p> <p>Number of pixels L x H</p> <ul style="list-style-type: none"> • 8K 7680 x 4320 • 4K 4096 x 2160 • UHD 3840 x 2160 • 2K 2048 x 1080 • HD 1920 x 1080 • HD 1280 x 720 	<p>▪ Frequency (speed)</p> <p>Type of scanning:</p> <p>Progressive (P)</p> <ul style="list-style-type: none"> • 60 P, 59,98 P, 50 P, 48 P • 30 P, 29,97 P • 25 P, 24 P • 23,97§ P <p>Interlace (i)</p> <p>Shooting interlace is not an option in DCI</p>	<p>▪ Color depth</p> <p>Quantization</p> <ul style="list-style-type: none"> • 16 bits • 12 bits • 10 bits • 8 bits 	<p>▪ Color sampling</p> <p>Mode of treatment</p> <ul style="list-style-type: none"> • RAW • RGB 4:4:4 • Y-Cb-Cr <ul style="list-style-type: none"> ○ 4:2:2 ○ 4:2:0 ○ 4:1:1 ○ 3:1:1
<p>▪ Codec</p> <p>Level and type of compression</p>	<p>▪ Bitrate</p> <p>Mbp/s</p>	<p>▪ Container (wrapper)</p> <p>Define the structure of the file</p>	<p>▪ Storage device (media)</p> <ul style="list-style-type: none"> • Reliability • Professional/Consumer • Speed

©: Franck Montagne Postproduction Supervisor/Instructor - <http://www.imagemagie.com/>

Storage device (Media)

STORAGE DEVICE - MEDIA

WHAT IS IMPORTANT TO KNOW ABOUT MEDIA PERFORMANCES

- Type of file format recordable (Codec, frame rate, resolution, bitrate, color sampling, quantification, container)
- High speed recording capacities. Frame rate is an important parameter
- Recording times/capacities
- Minimum/maximum read/write speed
- Some manufacturers guarantee speeds, some not.
- Transfer speeds (offload) linked to readers/accessories/adapters. Transfer speeds vary and are dependent on host device.
- Combination between camera and media (example: Arri Amira approves or not media)


WHAT IS IMPORTANT TO KNOW ABOUT THE WAY CAMERA MANUFACTURERS ARE HANDLING & CHOOSING THE MEDIA - THE RECONSTRUCTION

- Example: SxS Cards, they are designed for motion picture and they contain safety tools (controller with an intelligence function). Files can be reconstructed in a special Sony center in Brussels



©: Philippe Ros Cinematographe AFC & Digital Imaging Supervisor www.philipperos.com


Consequences of bitrate and compression choices

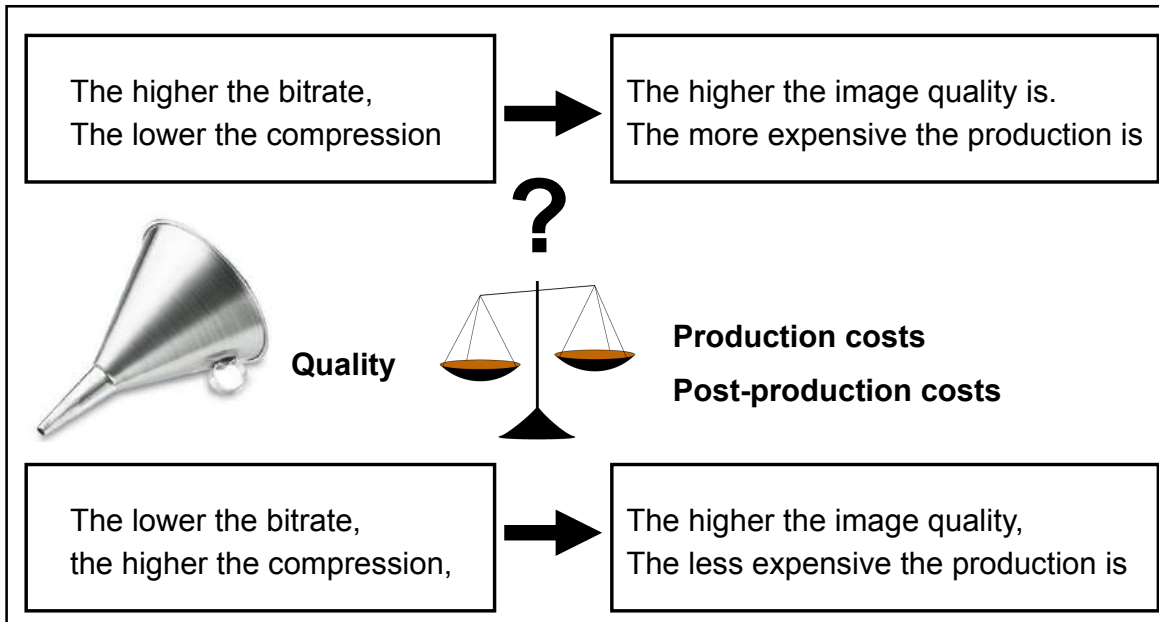

©: Philippe Ros Cinematographe AFC & Digital Imaging Supervisor www.philipperos.com


The new balances

Generally each program results from a compromise between:



Quality **Production costs**

Nowadays:



Quality **Production costs**
Post-production costs
Exhibition costs


TRANSMEDIA

© Philippe Ros Cinematographe AFC & Digital Imaging Supervisor www.philipperos.com

Bitrate & Codec

The bitrate, Mbp/s (number of information per second) depends :

- On the image width (from 960 pixels to 4096 pixels, even more)
- On the image height (from 720 pixels to 3072 pixels, even more)
- On the signal processing (Raw, RVB or Component Y-Cb- Cr)
- On the quantization (8-bit, 10-bit, 12-bit, 16-bit, 32-bit)
- On the frequency (or speed) (23.98, 24, 25, 29.97,30, 50, 59.94,60 fps, ...)
- On the Codec type used (Jpeg 2000, ProRez, XAVC, Mpeg2...)




Codec : Coding - Decoding


Example : JPEG 2000 (300 Mb/s) - ProRes 12-bit 4:4:4:4 (280Mb/s) - AVC-Intra 100 (100 Mb/s)

Three important notions


Bitrate



Compression



Information reduction





© Philippe Ros Cinematographe AFC & Digital Imaging Supervisor www.philipperos.com

Consequences of bitrate and compression choices

What is the advantage for SFX and grading of having :




- 10 bits rather than 8 bits ?
- 10 bits RGB rather than 10 bits Y-Pb-Pr ? :
 - ✓ Keying made easier
 - ✓ Compositing made easier
 - ✓ Better rendering of flesh tones
 - ✓ Color correction made easier



All these choices are not trivial.
The consequences on the finished film's quality and cost must totally be taken into account.

©: Philippe Ros Cinematographeur AFC & Digital Imaging Supervisor www.philipperos.com

Consequences of bitrate and compression choices

 Alexa (Arri SxS recording) 12 bits 4:4:4:4 330 Mb/s	 F35 (Sony) 10 bits 4:4:4 440 Mb/s or 880 Mb/s	 EOS C300 (Canon) 8 bits 4:2:2 50 Mb/s
4096 shades of grey in the Red channel	1024 shades of grey in the Red channel	256 shades of grey in the Red channel
4096 shades of grey in the Green channel	1024 shades of grey in the Green channel	256 shades of grey in the Green channel
4096 shades of grey in the Blue channel	1024 shades of grey in the Blue channel	256 shades of grey in the Blue channel
Colour depth: 4096 x 4096 x 4096= More than 68 billion of colors	Colour depth: 1024 x 1024 x 1024= More than 1 billion of colors	Colour depth: 256 x 256 x 256 But with component Y Cb Cr sampling: More than 2 million of legal colors but less possibilities due to compression

©: Philippe Ros Cinematographeur AFC & Digital Imaging Supervisor www.philipperos.com

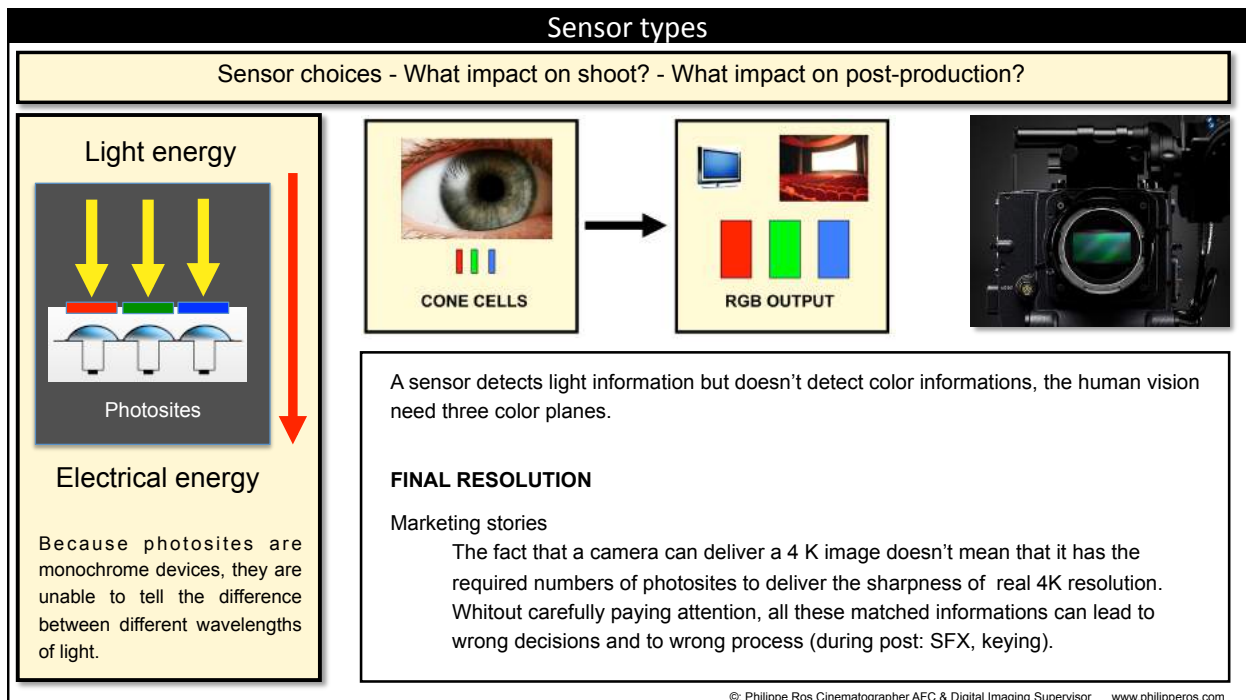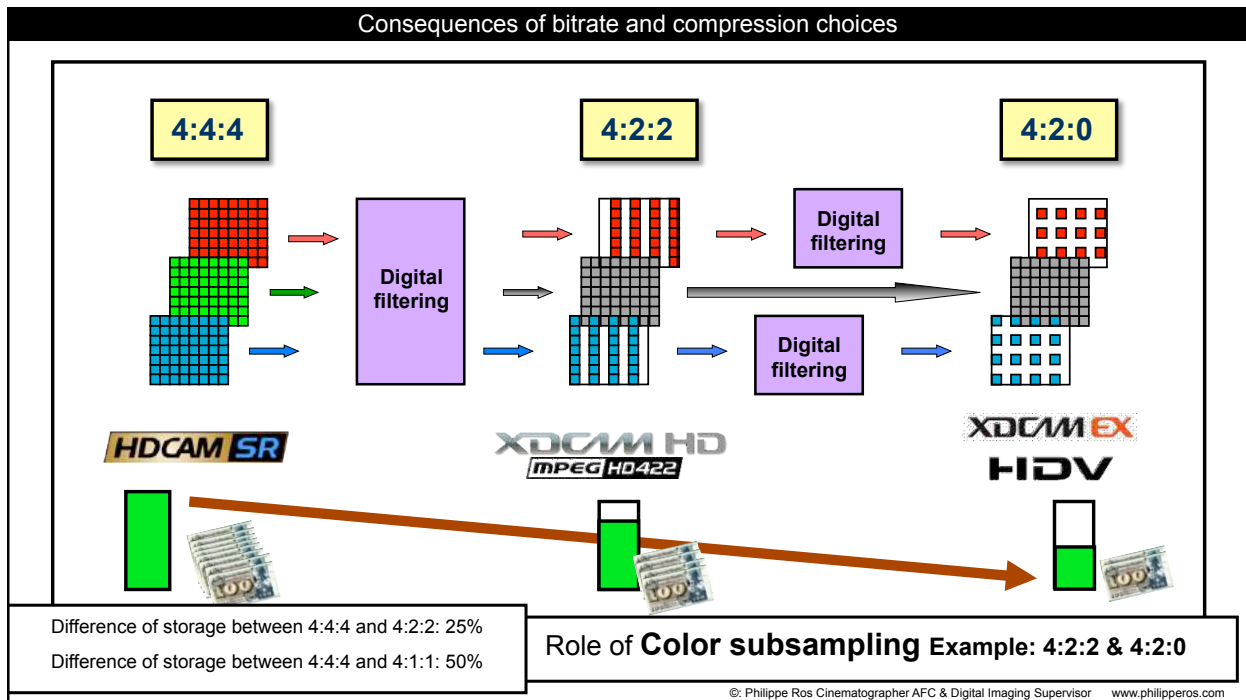

Camera sensor - Pixels vs Photosites


Great confusion or / and good marketing between:

- Number of photosites
- Size of the sensor
- Number of sensors
- Type of sensor
- Number of pixels recorded
- Resolution / sharpness / MTF
- Recording format
- Exhibition format

In postproduction 2K and 4K refers to the output of a line array scanner scanning film, so that for each frame scanned at 4K, you wind up with 4K red pixels, 4K green and 4K blue.

There are no pixels on a sensor but photosites. Pixels appears during sampling and recording

The type of sensor will have a direct influence on the workflow and therefore on the budget

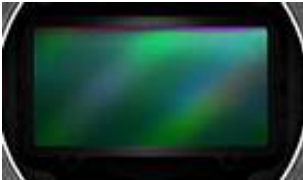

SENSOR

➔

RECORDING

➔

POSTPRODUCTION & EXHIBITION

PHOTOSITES

➔

SAMPLING & PIXELS

➔


PIXELS

©: Philippe Ros Cinematographe AFC & Digital Imaging Supervisor www.philipperos.com


Sensor types

▪ The 3 x sensors cameras (examples)


F23 (Sony)
3-chip 2/3-inch
1920 x 1080 x 3
photosites




HDW-F900 (Sony)
2/3" 3-CCD sensor
1920 x 1080 x 3
photosites




AJ-HPX 3700
2/3" 3-CCD sensor
1920 x 1080 x 3
photosites



EX-3 (Sony)
3 x 1/2" CMOS sensor
1920 x 1080 x 3 photosites



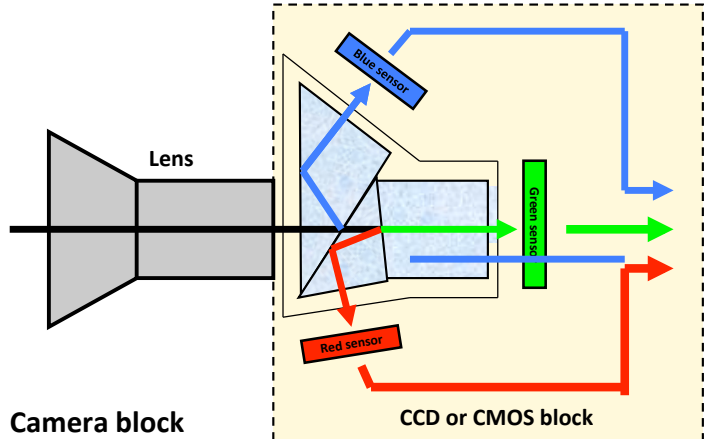


Camera block

➔

RGB OUTPUT



©: Philippe Ros Cinematographe AFC & Digital Imaging Supervisor www.philipperos.com


Sensor types

▪ **The 1 Sensor cameras - The Bayer pattern**


A Bayer filter could be defined as a **digital negative** which is used during post-production to restore an RGB flow

We are in front of a **lab**, a software which develops images and which:


- Is not always built-in
- Is not always done real time.
- Can be done in various ways than the mcamera manufacturer (Irridas, Glue Tools, Phantom, ColorFront)

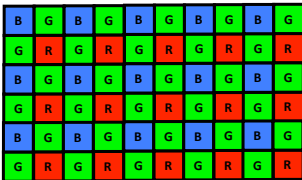

Debayering



RGB OUTPUT




Debayering is not only a mathematic process but also an artistic process.

Math process


©: Philippe Ros Cinematographe AFC & Digital Imaging Supervisor www.philipperos.com

Sensor types


▪ **The 1 Sensor cameras - The Bayer pattern**




F65
(Sony)




Alexa
(Arri)




Epic
(Red Digital Cinema)




F55
(Sony)




C700
(CANON)




F3
(Sony)




C500
(Canon)

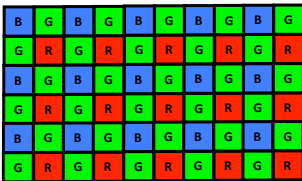

Debayering



RGB OUTPUT



©: Philippe Ros Cinematographe AFC & Digital Imaging Supervisor www.philipperos.com

